

# Charleston\*



Boxwood



Canarywood



Kingwood



Leadwood




Partridgewood



Tulipwood



Verawood

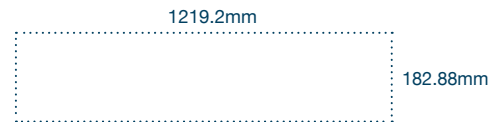

## PRODUCT SPECIFICATIONS

Type of installation	Dry Back (Stick Down)
Application	Heavy Residential
Wear Layer Thickness	0.3mm
Fire Resistance	B(fl) s1 (EN 13501-1)
Stain and Chemical Resistance	Excellent (EN 423)
Overall Thickness	2mm
Plank Size	1219.2mm x 182.88mm (l x w)
Quantity per Box	3.34m <sup>2</sup>
Number of Planks	15 planks per box
Abrasion Resistance	Group T (EN 660)
Slip Resistance	> 0.3 (EN 13893)
VOC Tested	Floorscore SCS-FS-03336
Castor Chair	Pass (EN 425) (use soft non-staining wheels)



ISO 9001  
ISO 14001

**vinyl.** **SAVA**  
Southern African Vinyls Association



® FSC Certified