




Taurus



Capricorn




Leo



Equinox*

PRODUCT SPECIFICATIONS

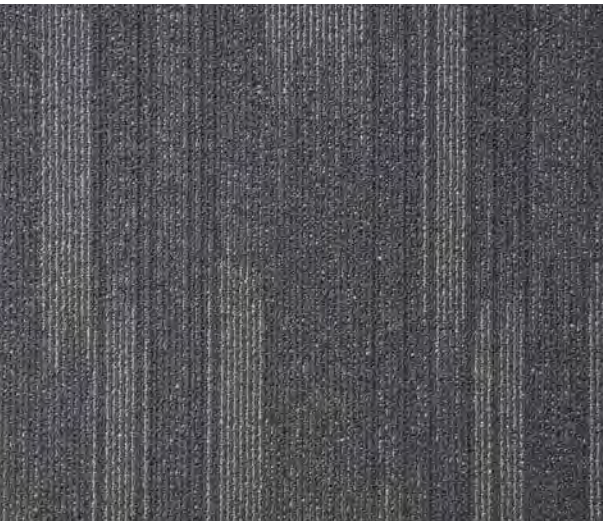

Construction	Tufted Multi Scroll Loop Pile
Fibre Type	Stainproof SDX (Solution Dyed Nylon)
Recycled Content	NexBac Eco (on request only) & Pile Yarn (certain colours only)
Use Classification	Heavy Commercial
Pile Height	2.5mm, 4.5mm, 5.5mm (± 0.5mm)
Total Thickness	7.5mm (± 0.5mm)
Pile Weight	±650 g/m ² **
Standard Sizing Available	50 x 50cm ^{***}
Machine Gauge	1/10"
Stitches / 10cm	45
Fire Index	Pass (7.8 kW/m ²)
Colourfastness To:	
(i) Light	7 (ISO 105 – B02)
(ii) Rubbing	(a) Wet 4 – 5 (ISO 105 – X12) (b) Dry 4 – 5 (ISO 105 – X12)
(iii) Water	4 – 5 (ISO 105 – E01)
Electrostatic Propensity	Less than 2.0 kV (ISO 6356 & EN 1307)
Static Control	Permanent
Voc Tested	Passed

Note: Carpet protector mats are necessary where castor wheels are used. ** Weighted average. *** Also available in 60cm x 60cm, 1m x 50 cm and 1m x 1m NexBac tiles. As these sizes are not standard, minimum production quantities apply. Please contact your nearest Belgotex Floors representative for more information.

